



FFM8040-OHR-400


FFM's oxidation-resistant high rejection RO membrane series is designed for large municipal demineralization systems and industrial wastewater treatment. Featuring low operating pressure, superior fouling resistance, and consistent performance, these membranes deliver high-quality permeate with excellent yield. Engineered for enhanced oxidation resistance, these elements maintain performance in oxidizing environments and offer extended service life.

Performance Parameters

Permeate Flow:	9000 gpd(34.1m ³ /d)
Salt rejection:	99.5%
Chlorine resistance:	>98% salt rejection after 25000ppm-h
Test conditions:	2000 mg/L NaCl solution 77 F(25°C) Operating Temperature 225 psi (1.55Mpa) Applied Pressure 15% Permeate Recovery 6.5-7.0 pH Range

*Single-element water outlet tolerance: ±20% (standard conditions).

Product Specifications

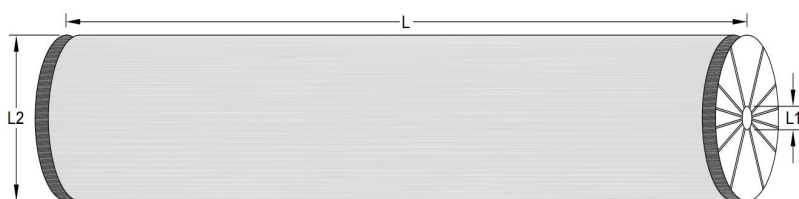

Dimensions-inches(mm)		
L	L1	L2
40.0(1016)	1.12(28.5)	7.9(201)

Item	Specification
Configuration	Spiral Wound
Membrane Polymer	Composite Polyamide
Membrane Active Area	400ft ² (37.2m ²)

*Post-update performance may vary within specified design limits, with ±3% membrane area tolerance.

Operation Parameters

Maximum Operating Temperature:	113°F (45°C)
Maximum Operating Pressure:	600 psi (4.1 Mpa)
Maximum Pressure Drop Per Element:	15psi (0.1 Mpa)
Maximum Pressure Drop Per Vessel:	50psi (0.35 Mpa)
pH Range, Continuous Operation:	2-11
pH Range, Short Term Cleaning (30min):	1-13
Maximum Feed Water SD(15mins):	5
Maximum Chlorine Concentration:	< 0.1mg/L

*The limitations shown here are for general use. For specialized applications or customized solutions, please contact FFM Inc. directly.