

## FFM8040SF-375


FFM's Seawater High-Flux RO membrane series delivers higher water production efficiency with its high flux and stable operation. This product has established a leading position in seawater desalination and serves as an ideal solution for large-scale desalination projects, including power plant boiler feed water production and other industrial applications.

### Performance Parameters

Permeate Flow:	7000 gpd(26.5m <sup>3</sup> /d)
Salt rejection:	99.7%
Test conditions:	30000 mg/L NaCl solution 77 F(25°C) Operating Temperature 800 psi (5.52Mpa) Applied Pressure 8% Permeate Recovery 6.5-7.0 pH Range

\*Single-element water outlet tolerance: ±20% (standard conditions).

### Product Specifications

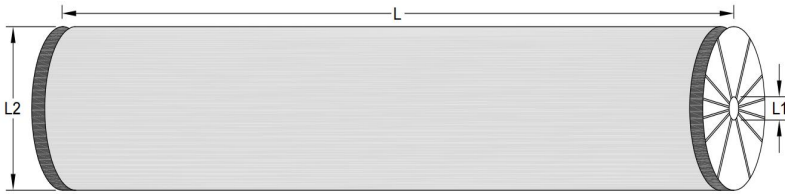

Dimensions-inches(mm)		
L	L1	L2
40.0(1016)	1.12(28.5)	7.9(201)

Item	Specification
Configuration	Spiral Wound
Membrane Polymer	Composite Polyamide
Membrane Active Area	375ft <sup>2</sup> (34.9m <sup>2</sup> )

\*Post-update performance may vary within specified design limits, with ±3% membrane area tolerance.

### Operation Parameters

Maximum Operating Temperature:	113°F (45°C)
Maximum Operating Pressure:	1000 psi (6.9 Mpa)
Maximum Pressure Drop Per Element:	15psi (0.1 Mpa)
Maximum Pressure Drop Per Vessel:	50psi (0.35 Mpa)
pH Range,Continuous Operation:	2-11
pH Range, Short Term Cleaning (30min):	1-13
Maximum Feed Water SD(15mins):	5
Maximum Chlorine Concentration:	< 0.1mg/L

\*The limitations shown here are for general use. For specialized applications or customized solutions, please contact FFM Inc. directly.